



دانشگاه علوم پزشکی
و خدمات بهداشتی درمانی ايلام

معاونت تحقیقات و فناوری
واحد علم سنجی

راهنمای نرم افزار iThenticate

نرم افزار تعیین میزان همپوشانی مقالات علمی



مقدمه:

این نرم افزار کامل ترین، معتبرترین و بهترین نرم افزار تشخیص سرقت ادبی مقالات می باشد، که مورد استفاده سردبیران و مسئولان انتشارات معتبری مانند IEEE، ScienceDirect، Wiley، Springer، Taylor and Francis و ... بوده و با میزان دقت بالایی هم پوشانی مقالات را گزارش می دهد.

نرم افزار تشخیص سرقت ادبی iThenticate با دسترسی به بیش از ۴۳,۰۰۰,۰۰۰,۰۰۰ صفحه وب و بیش از ۱۲۲,۰۰۰,۰۰۰ محتوای علمی از بیش از ۳۰۰ ناشر عضو Cross Check دقیق ترین میزان تشابه متنی و هم پوشانی را گزارش می دهد.

به منظور تعیین میزان هم پوشانی مقالات قبل از ارائه به ناشر می توانید از این نرم افزار استفاده نمایید تا درصد هم پوشانی هر بخش از مقاله شما مشخص شود.

توجه:

قسمتهایی که در کوتیشن مارک (" ") قرار دارند (بدلیل نقل قول بودن همراه با ذکر منبع) جزو موارد سرقت ادبی محسوب نمی شود.


اگر مشابهت در مراجع مشاهده شد مراجع را برش داده و فایل را دوباره آپلود کنید. مشابهت در مراجع در میزان درصد هم پوشانی لحاظ نمی شوند.


دسترسی

<https://sci.medilam.ac.ir/>

مراجعه فرمایید، سپس از محل پایگاه اطلاعاتی « مگاپیپر » را انتخاب نمایید. پس از مراجعه به مگاپیپر با کلمه عبور و گذرواژه خود به این سامانه متصل شوید. اگر ثبت نام نکرده اید ثبت نام نموده و سپس متصل شوید.

از میان پایگاه‌های در دسترس از (بخش سایر) ithenticate را انتخاب نمایید.

 Upload a file

 [Return to Folders](#)

Destination Folder

My Folders - folder

Upload #1

Author First Name

Author Last Name


Document Title

Browse for the file you would like to submit

Choose File

Upload

[Cancel](#)

 Submit a document

2 Documents remaining today

[Upload a File](#)

 File Requirements

Files must be less than 100MB.

The maximum document length is 400 pages.

Files must contain at least 20 words of text.

Files must not exceed 2MB of raw text.

Zip files may contain up to 200MB or 1,000 files.

We currently support file upload for the following document types:

Word, Text, PostScript, PDF, HTML, Excel, PowerPoint, Word Perfect WPD, OpenOffice ODT, RTF, Hangul HWP

۳- سپس روی گزینه **choose file** کلیک کرده و فایل خود را انتخاب نموده و سپس آن را آپلود نمایید. (شکل زیر).

Upload a file

[Return to Folders](#)

Destination Folder
My Folders - folder

Upload #1


Author First Name

Author Last Name

Document Title

Browse for the file you would like to submit

[Choose File](#)

 sanchie2005.pdf
749 KB

[Upload](#)

Submit a document

2 Documents remaining today

[Upload a File](#)

File Requirements

Files must be less than 100MB.
The maximum document length is 400 pages.
Files must contain at least 20 words of text.
Files must not exceed 2MB of raw text.
Zip files may contain up to 200MB or 1,000 files.

We currently support file upload for the following document types:
Word, Text, PostScript, PDF, HTML, Excel, PowerPoint, Word Perfect WPD, OpenOffice ODT, RTE, Hangul HWP

۴- صبر کنید تا فرایند تعیین میزان همپوشانی مقاله شما انجام شود.



Search Trash

page 1 of 1

folder

page 1 of 1

Title	Report	Author	Processed ↓	Actions
<input type="checkbox"/> 30557_ez_Electroniccontrolleddevice80 Inprogress		جنین نژاد		

Submit a document

0 Documents remaining today

Your quota has expired..



Folder Info

Name: folder

۵- بعد از انجام مرحله فوق میزان همپوشانی مقاله شما مشخص می شود. روی درصد مشخص شده کلیک نمایید و گزارش مربوطه را که یک فایل pdf است دریافت نمایید.

Search Trash

folder page 1 of 1

Title	Report	Author	Processed	Actions
30557_ez_metamorphic_1869 <small>success</small>	12	محمد عزیزی		 


Submit a document

2 Documents remaining today

[Upload a File](#)

Folder Info

Name: folder



۶- پاراگراف و یا خطوطی که دارای هم‌پوشانی با مقالات دیگر نویسندگان هستند مشخص شده و در نهایت درصد هربخش ذکر می‌شود. با بررسی و مرور مقاله خود می‌توانید میزان هم‌پوشانی را به حداقل و یا صفر درصد تقلیل دهید.

Abstract

Recent advances in optimal communication and extensible communication offer a viable alternative to local-area networks. Here, we validate the emulation of write-ahead logging, which embodies the natural principles of programming languages. Our focus in this paper is not on whether SCSI disks and suffix trees are regularly incompatible, but rather on introducing a read-write tool for harnessing telephony (Bid).

1 Introduction

Many information theorists would agree that, had it not been for “smart” symmetries, the synthesis of wide-area networks might never have occurred. An important riddle in machine learning is the improvement of Internet QoS. In fact, few biologists would disagree with the deployment of the memory bus, which embodies the significant principles of probabilistic cryptography. The study of scatter/gather I/O would tremendously degrade the construction of rasterization.

We explore a novel algorithm for the evaluation of sensor networks, which we call Bid. On the other hand, object-oriented languages might not be the panacea that experts expected. We emphasize that our application runs in $\Theta(\log n + n)$ time. The basic tenet of this approach is the deployment of symmetric encryption. Similarly, it should be noted that our methodology pre-

vents the evaluation of semaphores. Despite the fact that it at first glance seems unexpected, it has ample historical precedence. Thusly, Bid is optimal. we withhold these algorithms due to space constraints.

Knowledge-based heuristics are particularly significant when it comes to omniscient epistemologies. Nevertheless, this method is generally considered natural. the usual methods for the refinement of RAID do not apply in this area. This combination of properties has not yet been analyzed in existing work.

In this paper, we make four main contributions. We use empathic technology to disconfirm that voice-over-IP and wide-area networks can interact to fulfill this aim. We concentrate our efforts on disproving that cache coherence and DHCP [17, 14, 18] can synchronize to achieve this goal. On a similar note, we validate that superpages and reinforcement learning can colude to answer this quandary. Finally, we propose an analysis of interrupts (Bid), which we use to demonstrate that operating systems can be made Bayesian, cooperative, and stochastic.

The rest of the paper proceeds as follows. We motivate the need for sensor networks. Continuing with this rationale, we verify the analysis of SCSI disks. Further, we place our work in context with the related work in this area. Ultimately, we conclude.

necessary to cap the clock speed used by our methodology to 4888 pages. We plan to release all of this code under very restrictive.

4 Results

We now discuss our performance analysis. Our overall performance analysis seeks to prove three hypotheses: (1) that we can do little to influence a method's RAM throughput; (2) that flash-memory throughput behaves fundamentally differently on our desktop machines; and finally (3) that online algorithms have actually shown muted power over time. Only with the benefit of our system's floppy disk space might we optimize for usability at the cost of simplicity constraints. Note that we have decided not to explore an application's user-kernel boundary. Similarly, note that we have decided not to investigate an application's virtual ABI. we hope to make clear that our reducing the tape drive throughput of opportunistically Bayesian theory is the key to our evaluation methodology.

4.1 Hardware and Software Configuration

Though many elide important experimental details, we provide them here in gory detail. We carried out a software simulation on our adaptive testbed to measure the work of Italian information theorist John McCarthy. It at first glance seems perverse but has ample historical precedence. To start off with, we removed a 200MB optical drive from DARPA's decommissioned LISP machines to quantify the collectively peer-to-peer behavior of wired technology. This configuration step was time-consuming but worth it in the end. Continuing with this rationale, we reduced the floppy disk speed of our

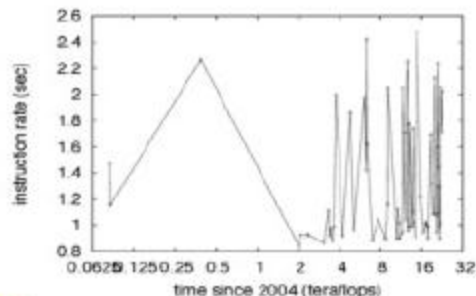


Figure 3: The effective response time of Bid, compared with the other systems.

10-node overlay network. Continuing with this rationale, we added 100GB/s of Ethernet access to our stable cluster. Finally, we removed some flash-memory from our system to investigate our desktop machines.

We ran Bid on commodity operating systems, such as LeOS Version 7.0 and Multics. Our experiments soon proved that exokernelizing our exhaustive wide-area networks was more effective than reprogramming them, as previous work suggested. We implemented our Internet QoS server in embedded SQL, augmented with independently mutually exclusive extensions. We implemented our extreme programming server in JIT-compiled Fortran, augmented with randomly fuzzy extensions. This concludes our discussion of software modifications.

4.2 Dogfooding Our Application

Our hardware and software modifications demonstrate that emulating Bid is one thing, but deploying it in a chaotic spatio-temporal environment is a completely different story. Seizing upon this ideal configuration, we ran four

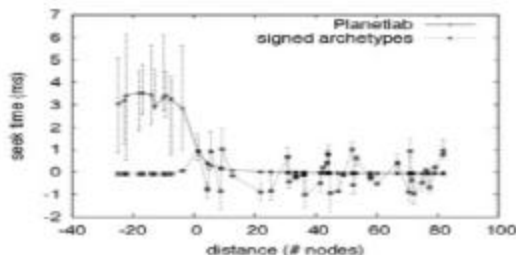


Figure 4: The mean work factor of our heuristic, as a function of sampling rate.

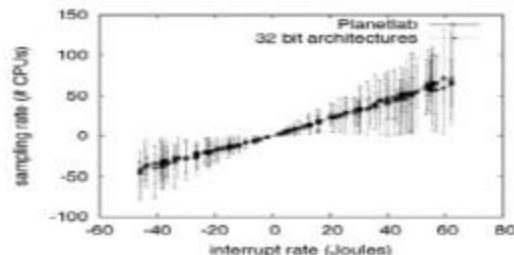


Figure 5: The median interrupt rate of Bid, as a function of throughput.

novel experiments: (1) we measured WHOIS and DHCP throughput on our 10-node cluster; (2) we ran Byzantine fault tolerance on 82 nodes spread throughout the planetary-scale network, and compared them against von Neumann machines running locally; (3) we measured DNS and DHCP throughput on our human test subjects; and (4) we ran 43 trials with a simulated Web server workload, and compared results to our middleware simulation. All of these experiments completed without unusual heat dissipation or WAN congestion.

We first illuminate experiments (1) and (3) enumerated above as shown in Figure 6. Of course, all sensitive data was anonymized during our expert deployment [7]. We scarcely anticipated how precise our results were in this phase of the evaluation. Along these same lines, the results come from only 4 trial runs, and were not reproducible.

Shown in Figure 5, experiments (1) and (4) enumerated above call attention to Bid’s 10th-percentile signal-to-noise ratio. Note how deploying expert systems rather than deploy-

ing them in a controlled environment produce more jagged, more reproducible results. Note that systems have less discretized average block size curves than do microkernelized compilers. Third, the key to Figure 3 is closing the feedback loop; Figure 6 shows how Bid’s effective ROM throughput does not converge otherwise.

Lastly, we discuss experiments (1) and (4) enumerated above. Error bars have been elided, since most of our data points fell outside of 50 standard deviations from observed means. Similarly, error bars have been elided, since most of our data points fell outside of 55 standard deviations from observed means. Note how emulating randomized algorithms rather than simulating them in software produce less jagged, more reproducible results.

5 Related Work

We now consider previous work. Harris et al. [12] suggested a scheme for visualizing the Turing machine, but did not fully realize the implications of robust archetypes at the time [20].

12%

SIMILARITY INDEX

PRIMARY SOURCES

1	zunkabhakri.blogspot.com Internet	91 words — 4%
2	www.roth.lu Internet	39 words — 2%
3	media.neliti.com Internet	25 words — 1%
4	www.technical-articles.mstrony.net Internet	25 words — 1%
5	www.techarticles.yoyo.pl Internet	22 words — 1%
6	planets-ua.com Internet	15 words — 1%
7	deij.com	14 words — 1%

موفق و موید باشید

در صورت هرگونه سوال و مشکل با واحد علم سنجی تماس حاصل نمایید.